

## HDMI OUTPUT

Sets the output from the HDMI connector of this unit when it is connected to a TV.

### ■ 3D Mode (for GZ-HM970/GZ-HM965)

Setting	Details
AUTO	Output images according to the supported monitor input format.
SIDE-BY-SIDE OUTPUT	Outputs images from the HDMI connector in "SIDE-BY-SIDE OUTPUT" (960x1080i x2ch) regardless of the supported monitor input format.
CERTAIN TV TYPES	Outputs images from the HDMI connector in "SIDE-BY-SIDE OUTPUT" (960x1080i x2ch) if the input format "1080i" is supported by the monitor. Outputs images from the HDMI connector in "2D" (576p or 576i) if "1080i" is not supported by the monitor.

#### Memo :

- When connected to a 3D compatible TV in the recording mode, images are output in "SIDE-BY-SIDE OUTPUT" regardless of the "HDMI OUTPUT" setting.

## Display on TV via HDMI Output (for GZ-HM970/GZ-HM965)

### ■ When HDMI OUTPUT is set to "AUTO"

Video Output	Video Output
2D TV	3D Compatible TV
2D	3D


- If 3D images cannot be seen even when connected to a 3D compatible TV, set "HDMI OUTPUT" to "CERTAIN TV TYPES" or "SIDE-BY-SIDE OUTPUT".
- If "HDMI OUTPUT" is set to "CERTAIN TV TYPES" when connected to a 2D TV, the left and right images will appear side by side.
- When 3D images are played back on a 3D compatible TV, the display on the LCD monitor is in 2D.
- For details on the settings of your TV, refer to its instruction manual.

### ■ 2D Mode (for GZ-HM970/GZ-HM960/GZ-HM870/GZ-HM860/GZ-HM855)

Setting	Details
AUTO	It is recommended to select "AUTO" usually.
576p	Select this when the video is not output in "AUTO" correctly.

## Displaying the Item

- 1 Tap "MENU".

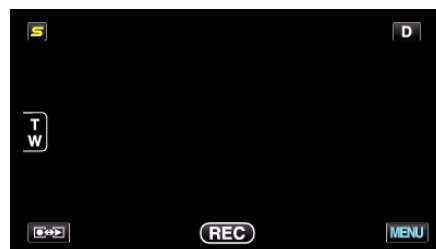

- 2 Tap the gear icon.



- 3 Tap "HDMI OUTPUT".

